


Interactive visualization and time-interval statistics with Vampir

Marc Schlütter, JSC

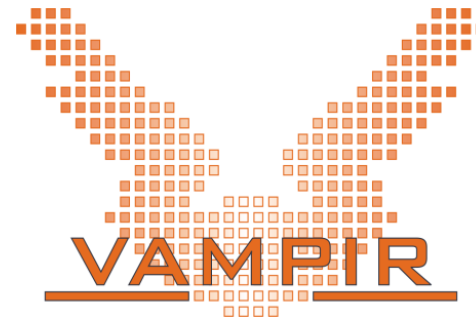

GWT Gesellschaft für
Wissens- und
Technologietransfer


Outline

- **Part I: Welcome to the Vampir Tool Suite**

- Mission
- Event Trace Visualization
- Vampir & VampirServer

- **Part II: Vampir Hands-On**

- Visualizing and analyzing BT-MZ

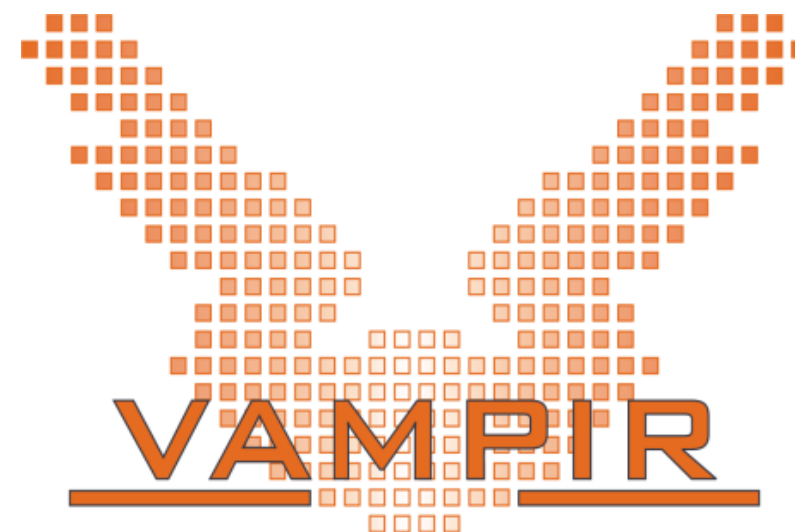

Event Trace Visualization with Vampir



- Alternative and supplement to automatic analysis
- Show dynamic run-time behavior graphically at any level of detail
- Provide statistics and performance metrics

- **Timeline charts**

- Show application activities and communication along a time axis

- **Summary charts**


- Provide quantitative results for the currently selected time interval

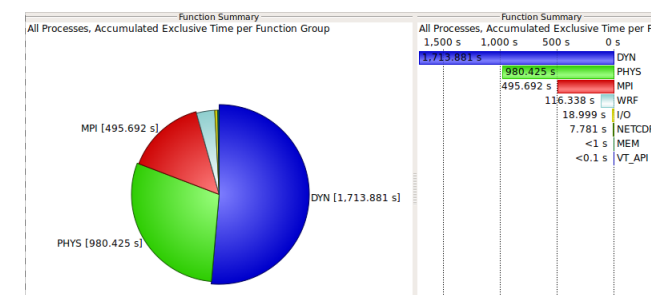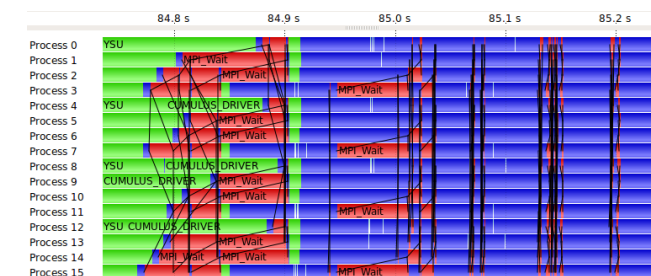

Visualization Modes (1)

Directly on front end or local machine

```
% ml vampir  
% vampir
```

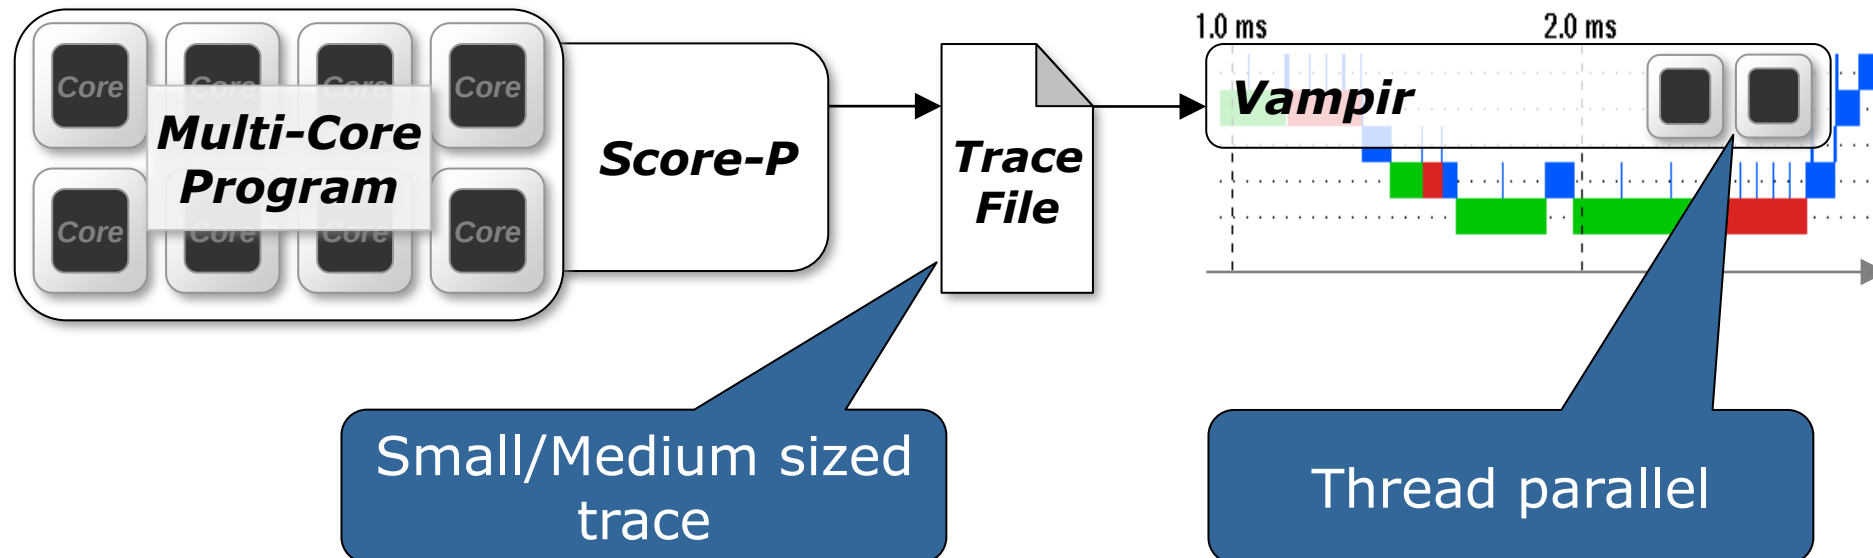


Visualization Modes (2)

On local machine with remote VampirServer

```
% ml vampir
% vampirserver start
```

```
% ml vampir
% vampir
```

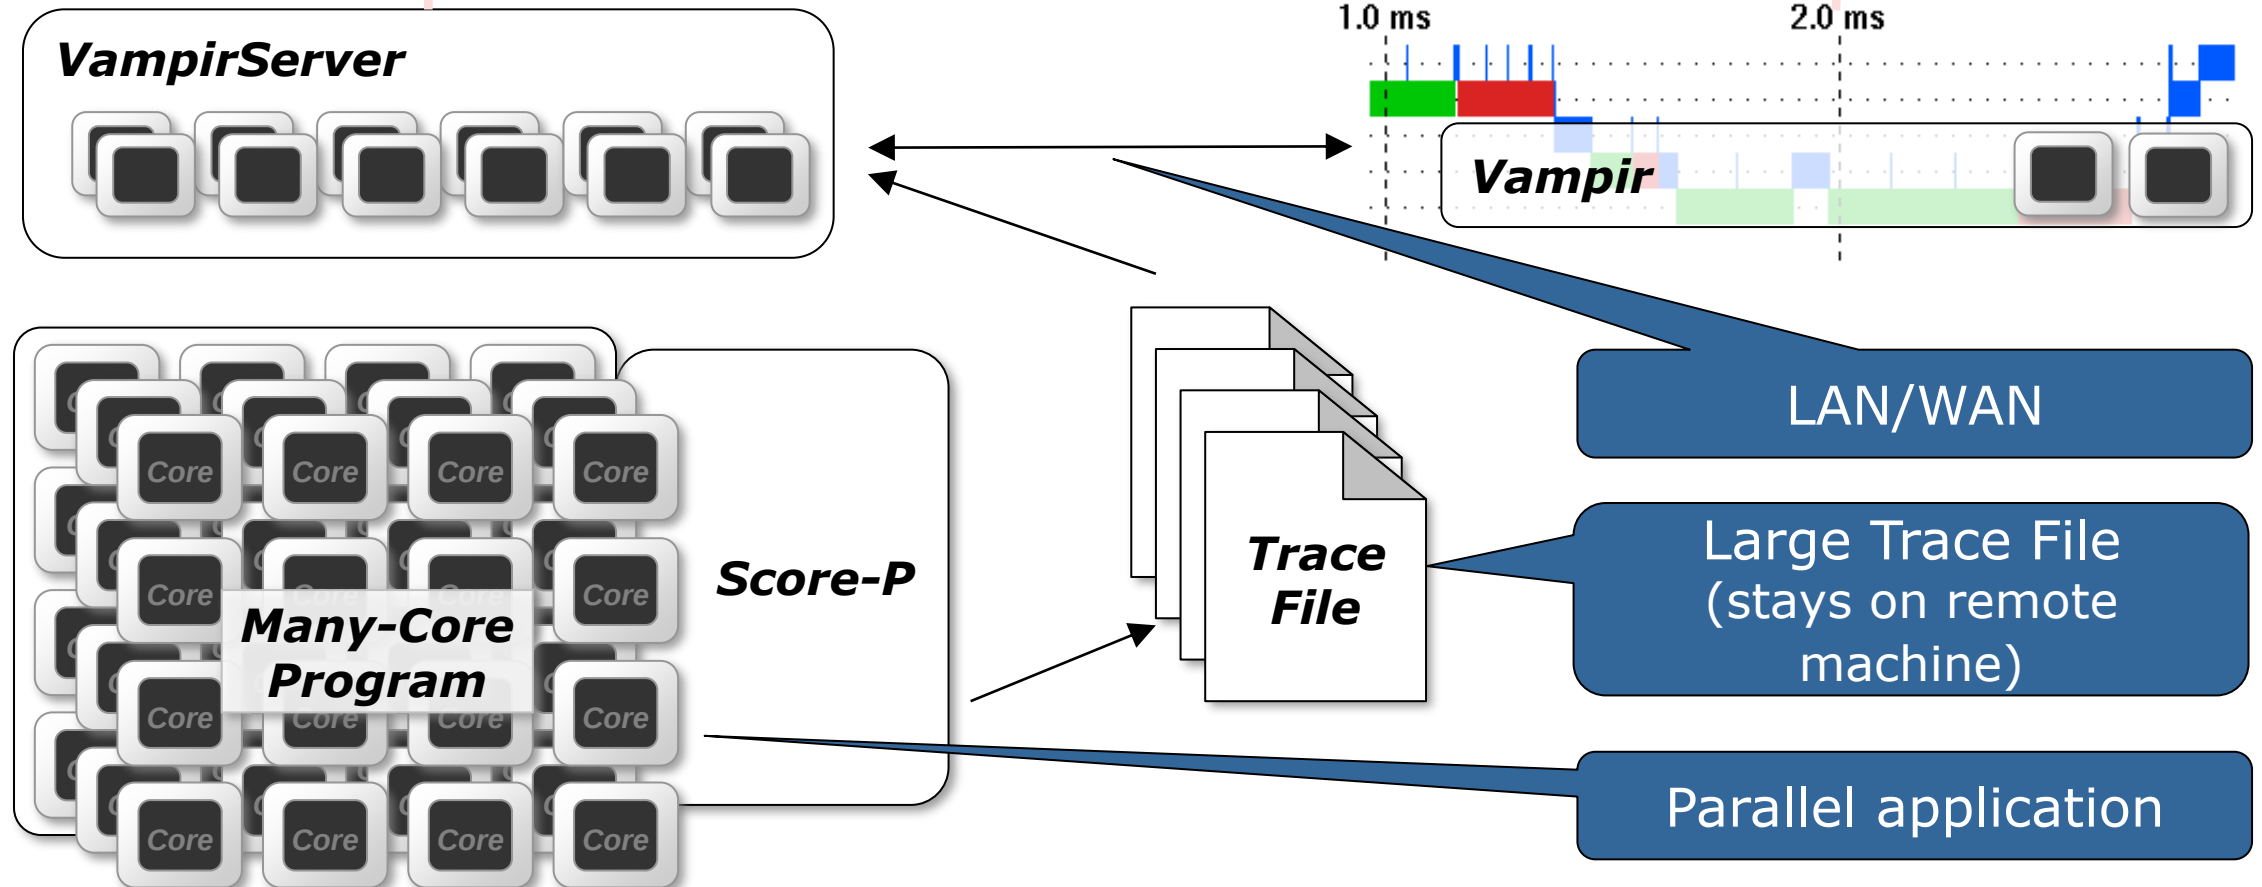

Starting VampirServer

USAGE

```
vampirserver [SUBCOMMAND] [ARGUMENTS ...] [-- [CUSTOM-ARGUMENTS ...]]
```

SUBCOMMANDS

```
list, ls [servers | launchers]
```

List server related information. Currently, this command lists all active servers or the available launch scripts (launchers). If no argument is provided, all active servers are listed.

...

```
start, up [-n] [-p] [-t] [LAUNCHER] [-- LAUNCHER-ARGUMENTS...]
```

Start a new server instance. LAUNCHER identifies the launch script to be used. LAUNCHER defaults to "slurm".

-n, --ntasks=**TASKS** set the number of analysis tasks

-t, --timeout=SECONDS set the startup timeout to SECONDS seconds

Try 'LAUNCHER -- --help' for launcher specific arguments.

...

```
stop, ex [SERVER_ID]
```

Stop the given server or the most recent server if no SERVER_ID is provided. The server ID is printed during startup. Alternatively, use the list command to print a list of available servers.

- Account for one extra task:
launcher script starts
TASKS+1 MPI processes

Starting VampirServer: SLURM launcher

```
% vampirserver start slurm -- --help
...
Launcher usage: slurm -- [--time=TIME] [-- SALLOC-ARGUMENTS...]
  -h, --help          show this little help
  -t, --time=TIME     total run time of the allocation


  -- SALLOC-ARGUMENTS...
                      remaining arguments are passed directly to salloc
```

Starting VampirServer

```
% vampirserver start -n 31 \  
  -- --time=3:00:00 \  
    -- -A $SBATCH_ACCOUNT --reservation=$SBATCH_RESERVATION \  
      -N 1 -c 2 --mem=0  
Launching VampirServer...  
Submitting slurm 3:00:00 minutes job (this might take a while)...  
salloc: Pending job allocation 3208476  
...  
salloc: Nodes n1589 are ready for job  
VampirServer 10.4.1 Professional (271537cd)  
Licensed to ZIH, TU Dresden  
Running 51 analysis processes... (abort with vampirserver stop 29603)  
VampirServer <29603> listens on: <host>:30059  
  
% vampirserver list  
29603 <host>:30059 [31x, slurm]  
% vampirserver stop 29603  
Shutting down VampirServer <29603>...  
Disconnecting client: <host>:30059  
VampirServer <29603> is down.
```


- Use host and port for SSH port forwarding

Visualization of the NPB-MZ-MPI / BT trace

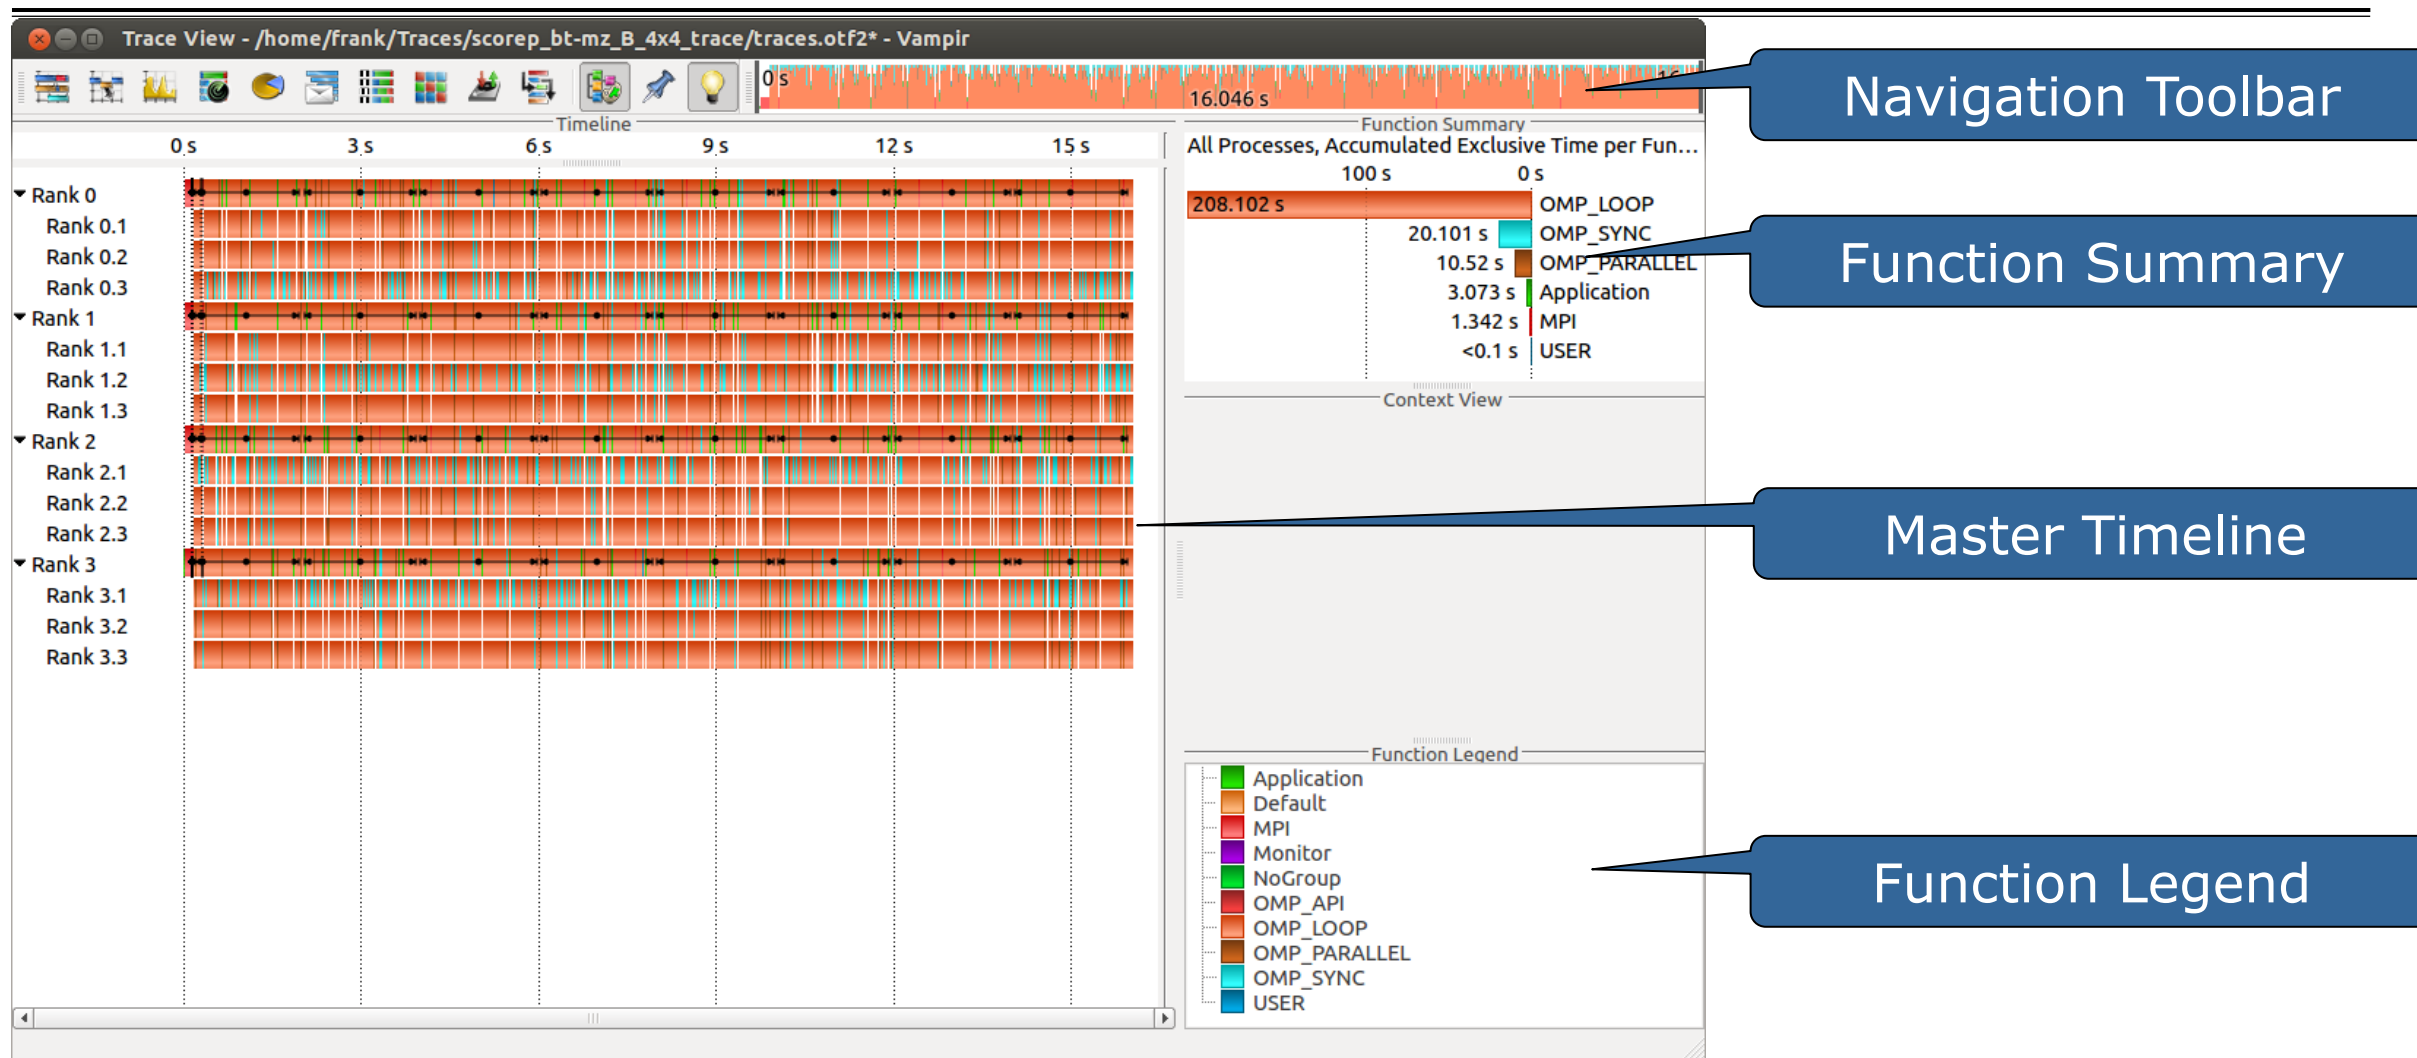

Visualization of the NPB-MZ-MPI / BT trace


Master Timeline

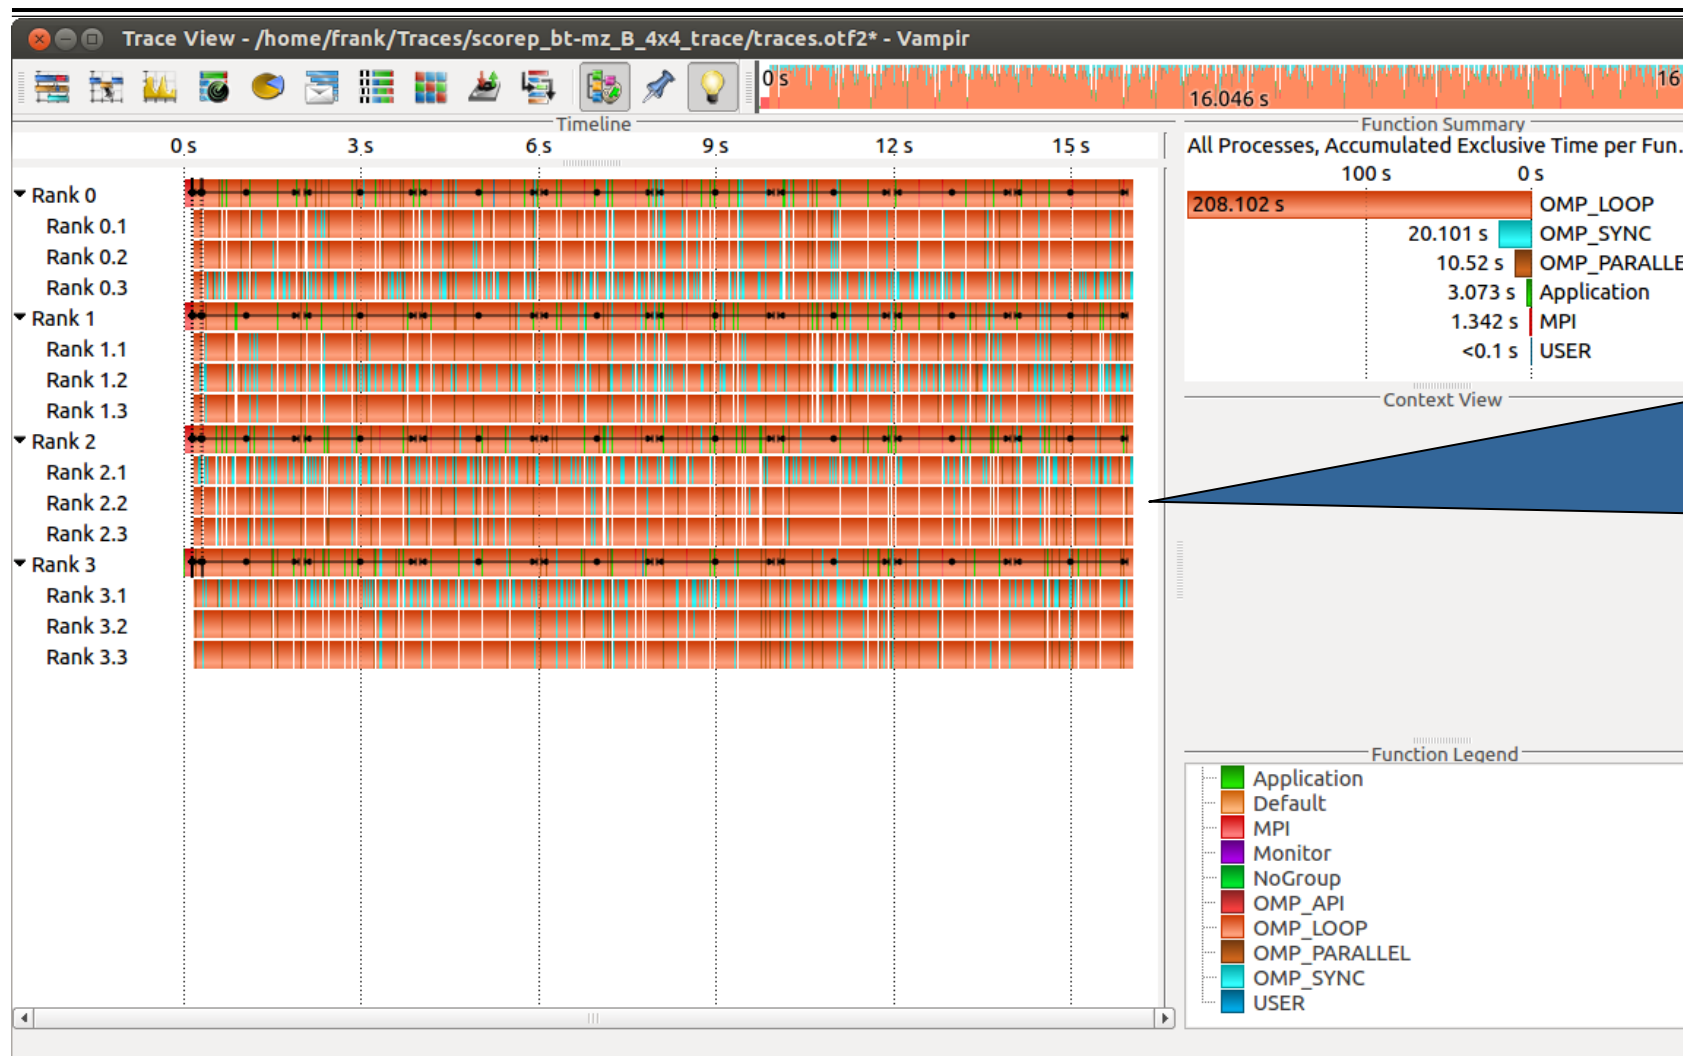

Detailed information about functions, communication and synchronization events for collection of processes.

Visualization of the NPB-MZ-MPI / BT trace


Process Timeline

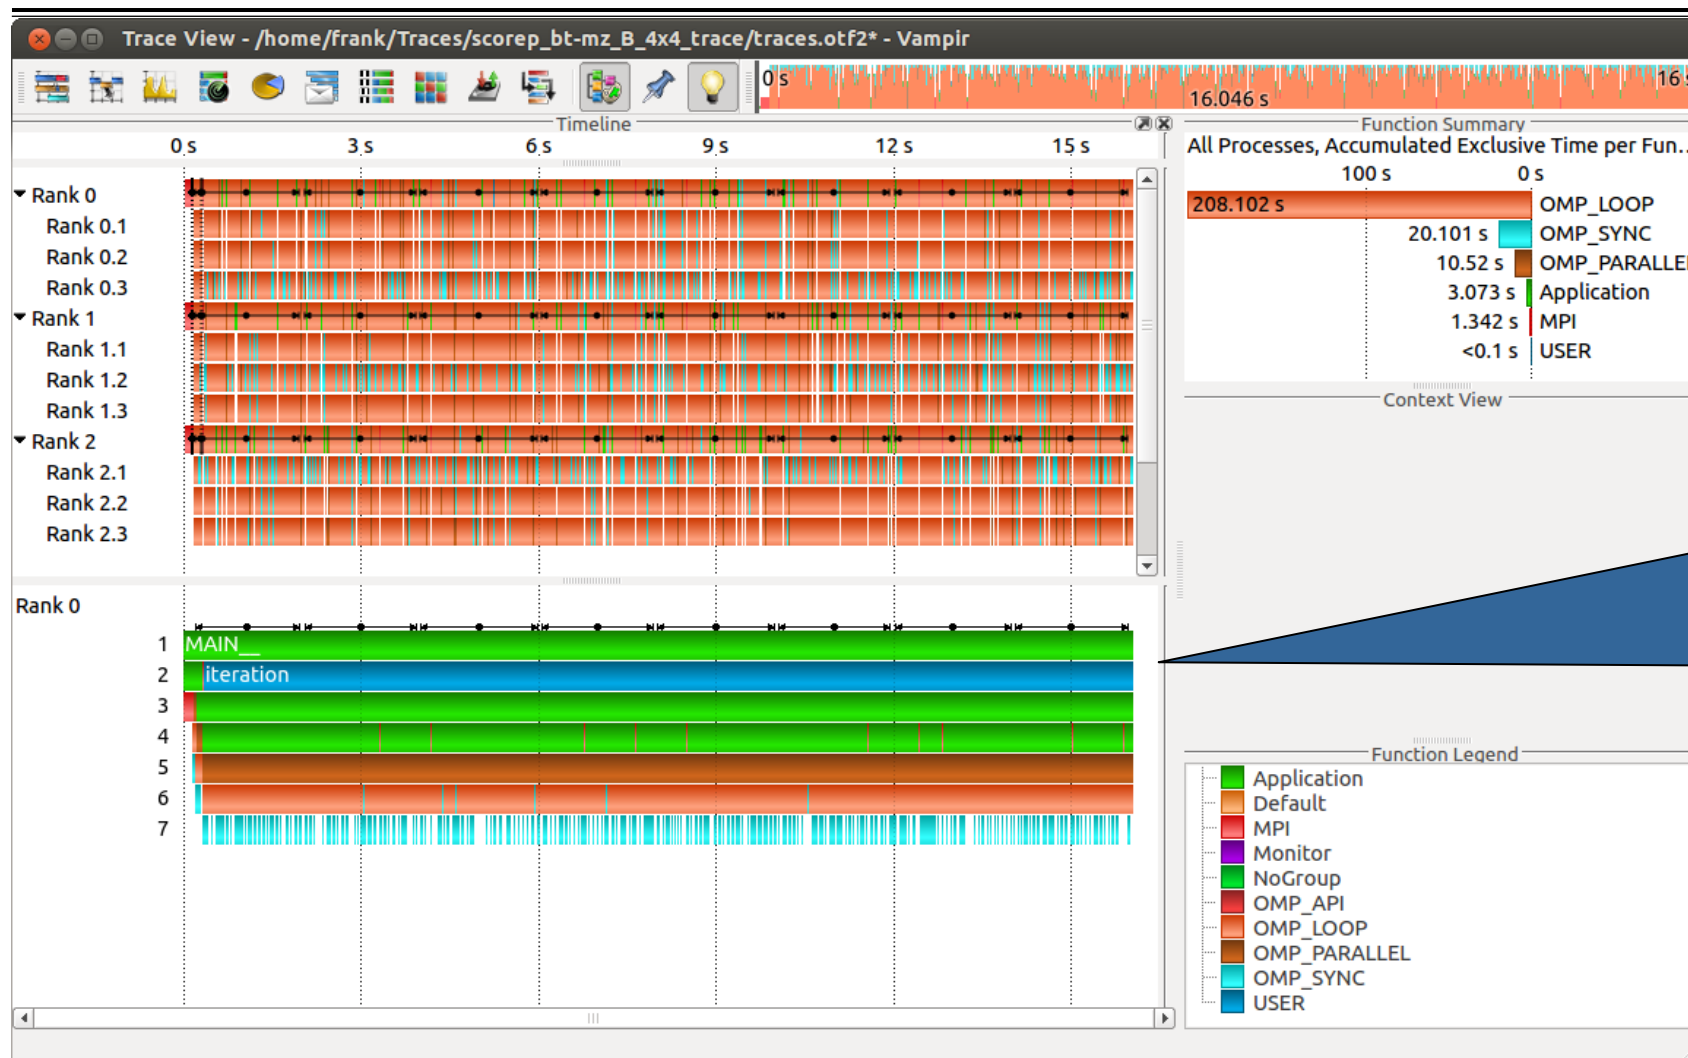

Detailed information about different levels of function calls in a stacked bar chart for an individual process.

Visualization of the NPB-MZ-MPI / BT trace

Typical program phases

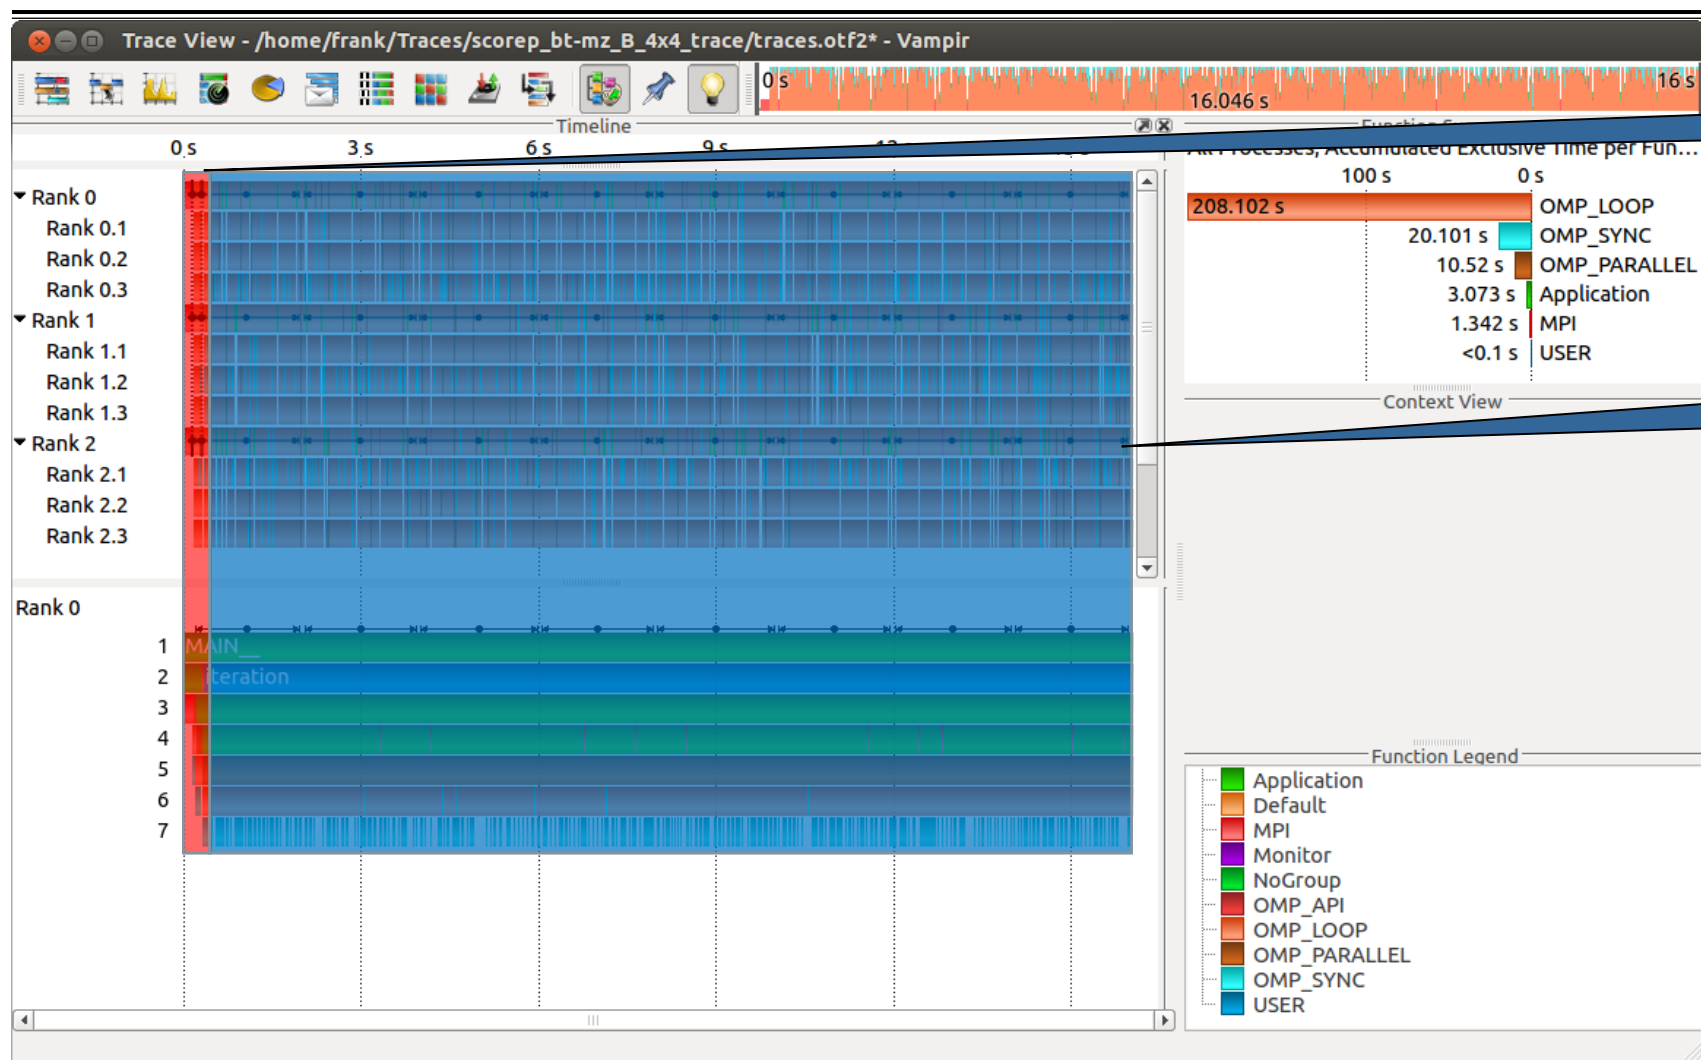


Initialisation Phase

Computation Phase

Visualization of the NPB-MZ-MPI / BT trace


Counter Data Timeline

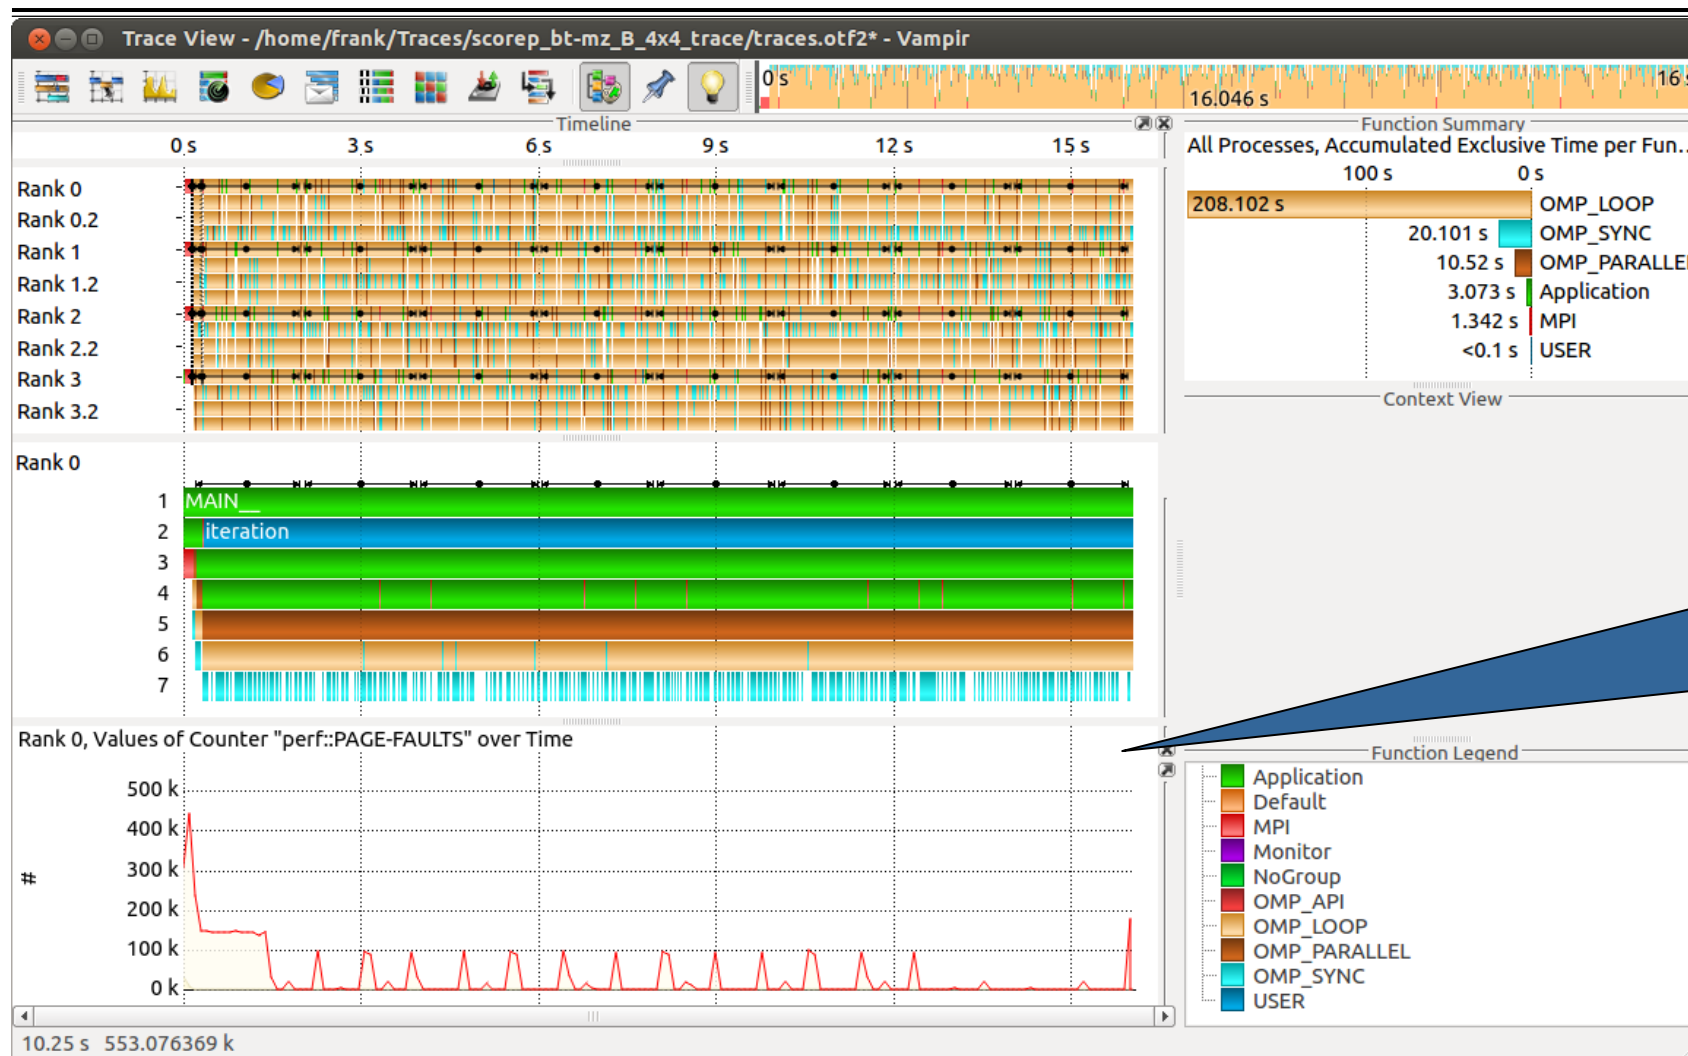

Detailed counter information over time for an individual process.

Visualization of the NPB-MZ-MPI / BT trace


Performance Radar

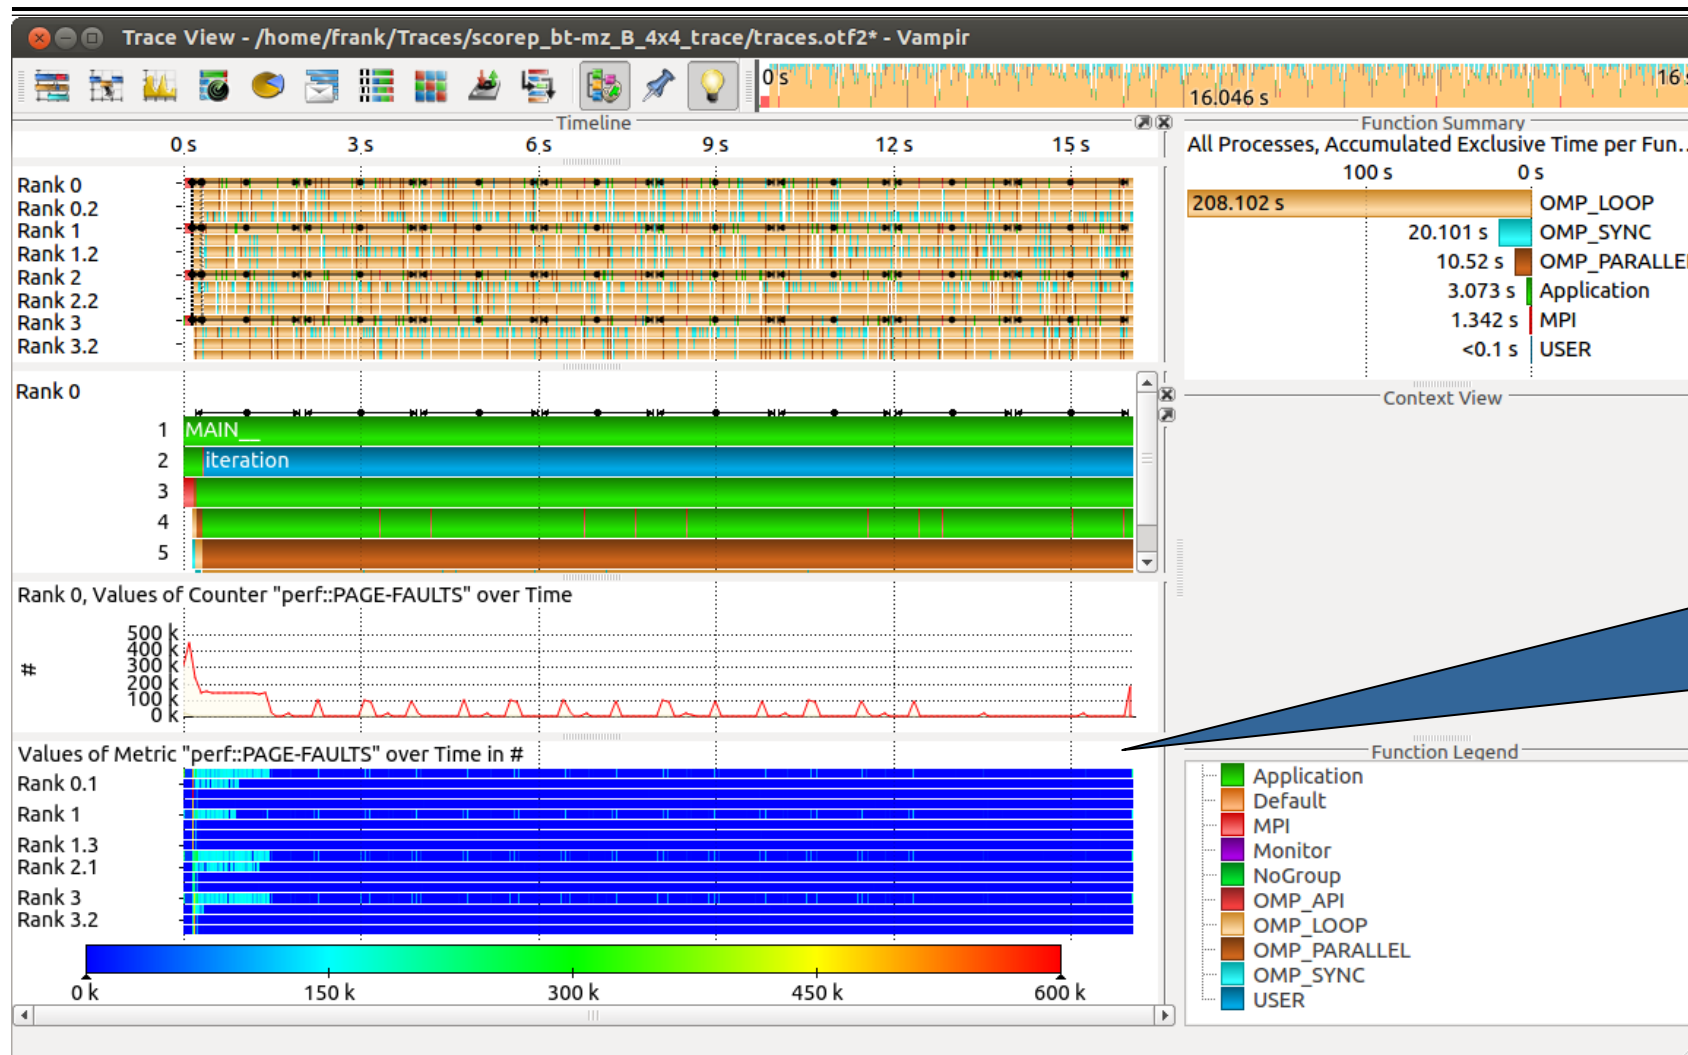

Detailed counter information over time for a collection of processes.

Visualization of the NPB-MZ-MPI / BT trace


Zoom in: Initialisation Phase

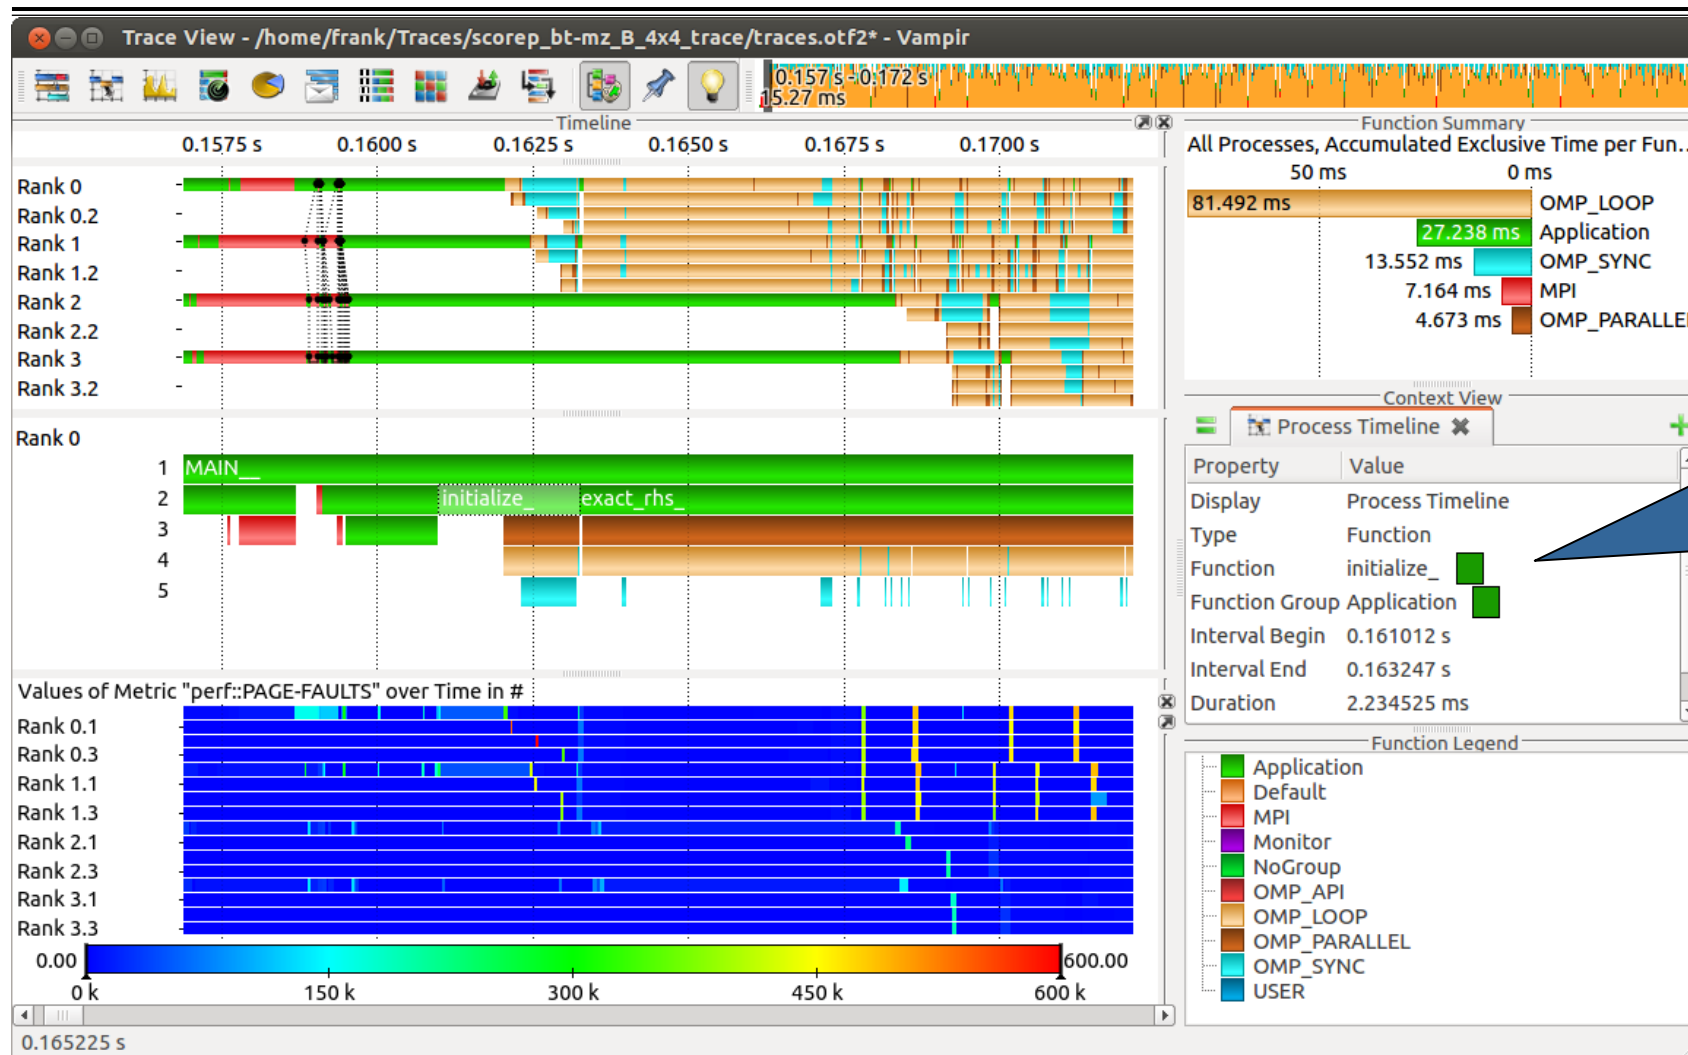

Context View:
Detailed information
about function
"initialize_".

Visualization of the NPB-MZ-MPI / BT trace


Find Function

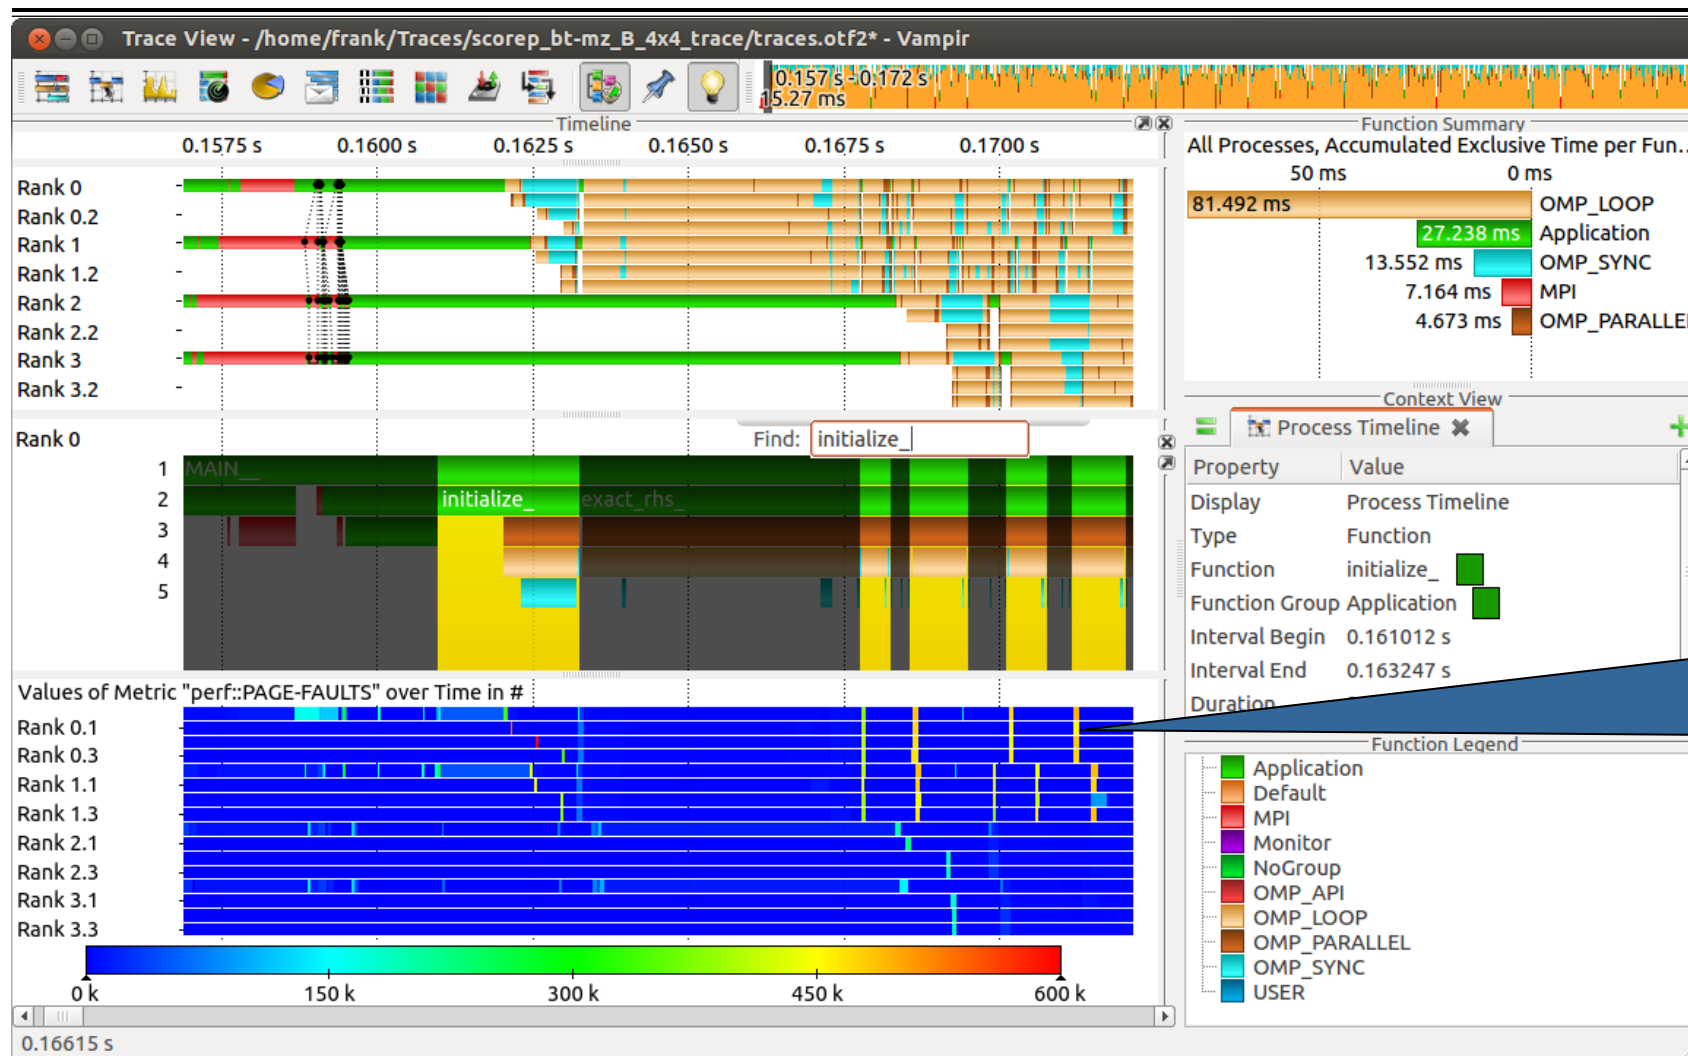

Execution of function "initialize_" results in higher page fault rates.

Visualization of the NPB-MZ-MPI / BT trace


Computation Phase

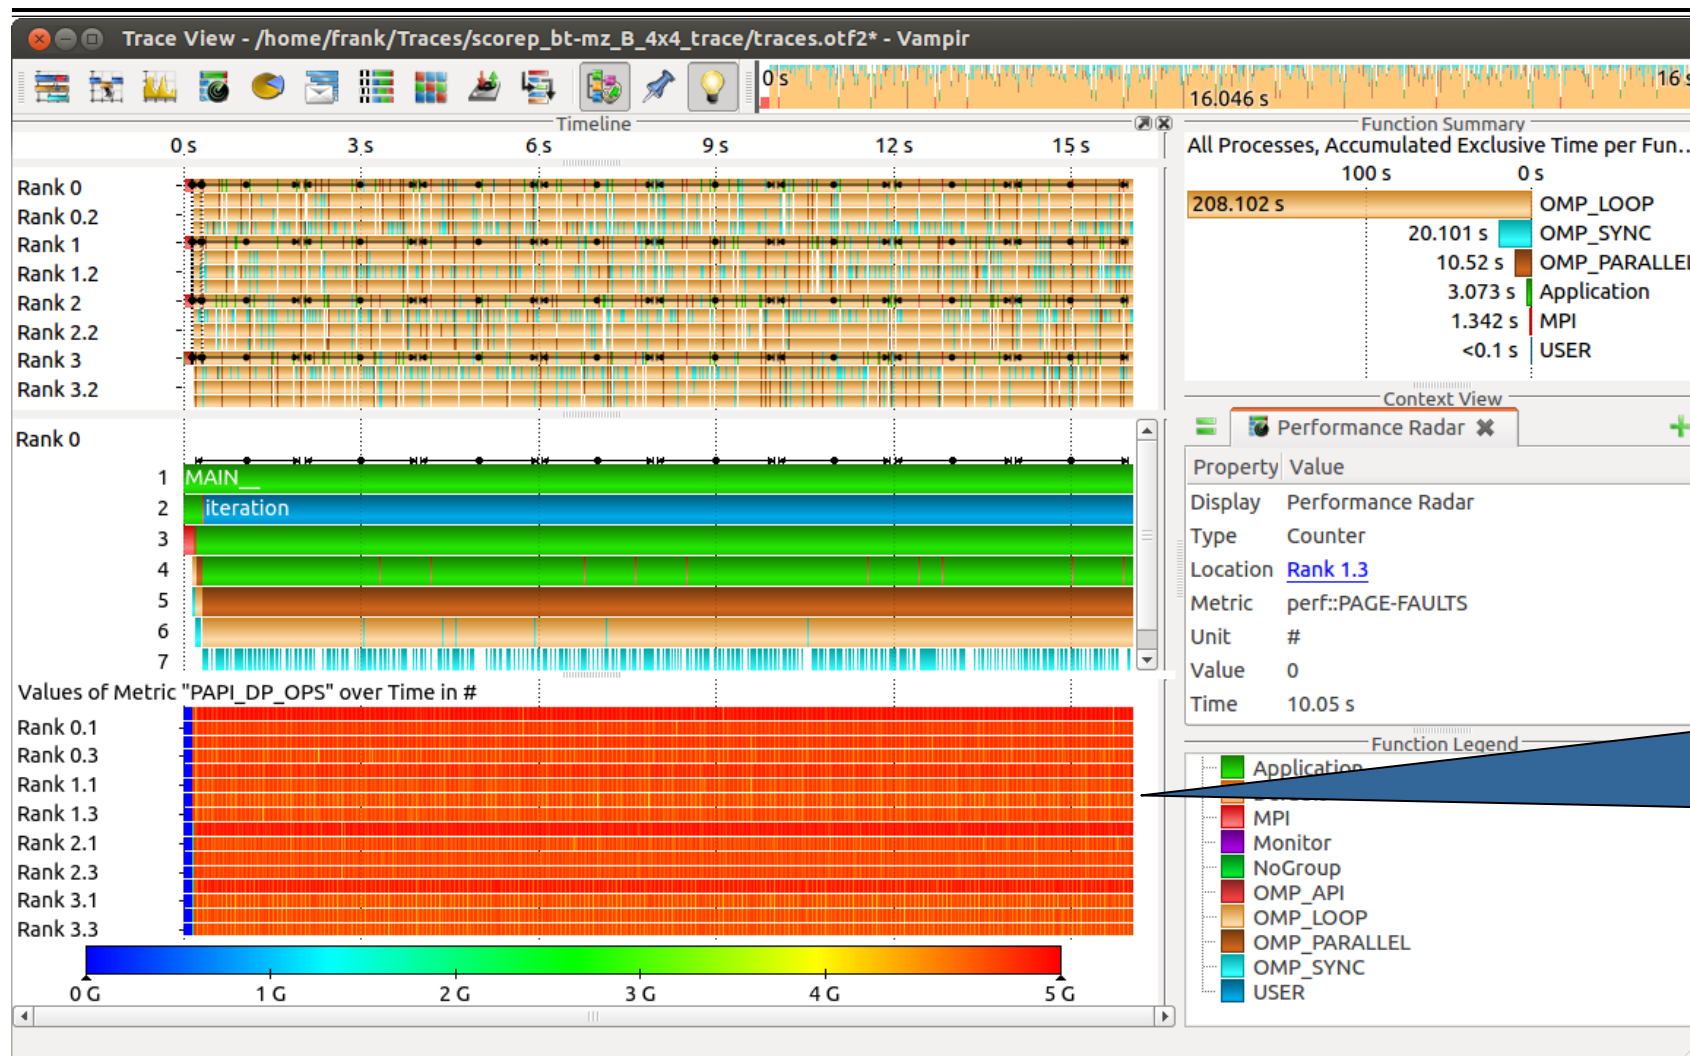

Computation phase results in higher floating point operations.

Visualization of the NPB-MZ-MPI / BT trace


Zoom in: Computation Phase

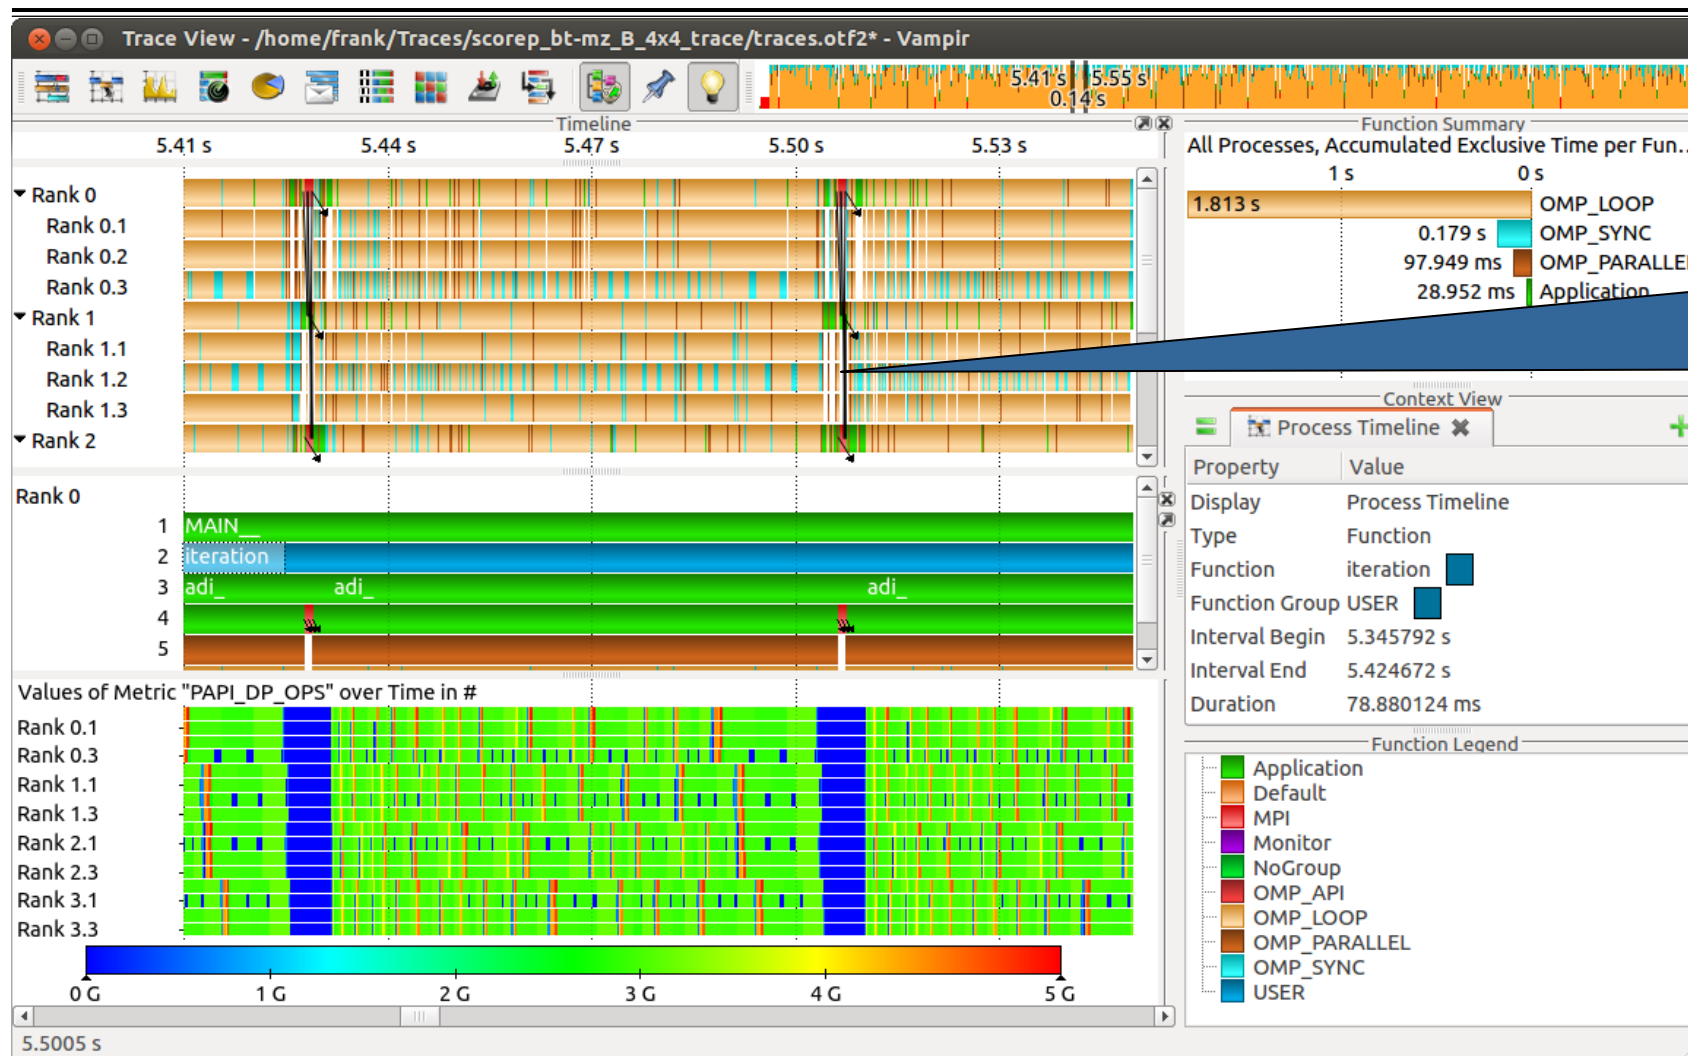

MPI communication results in lower floating point operations.

Visualization of the NPB-MZ-MPI / BT trace


Zoom in: Finalisation Phase

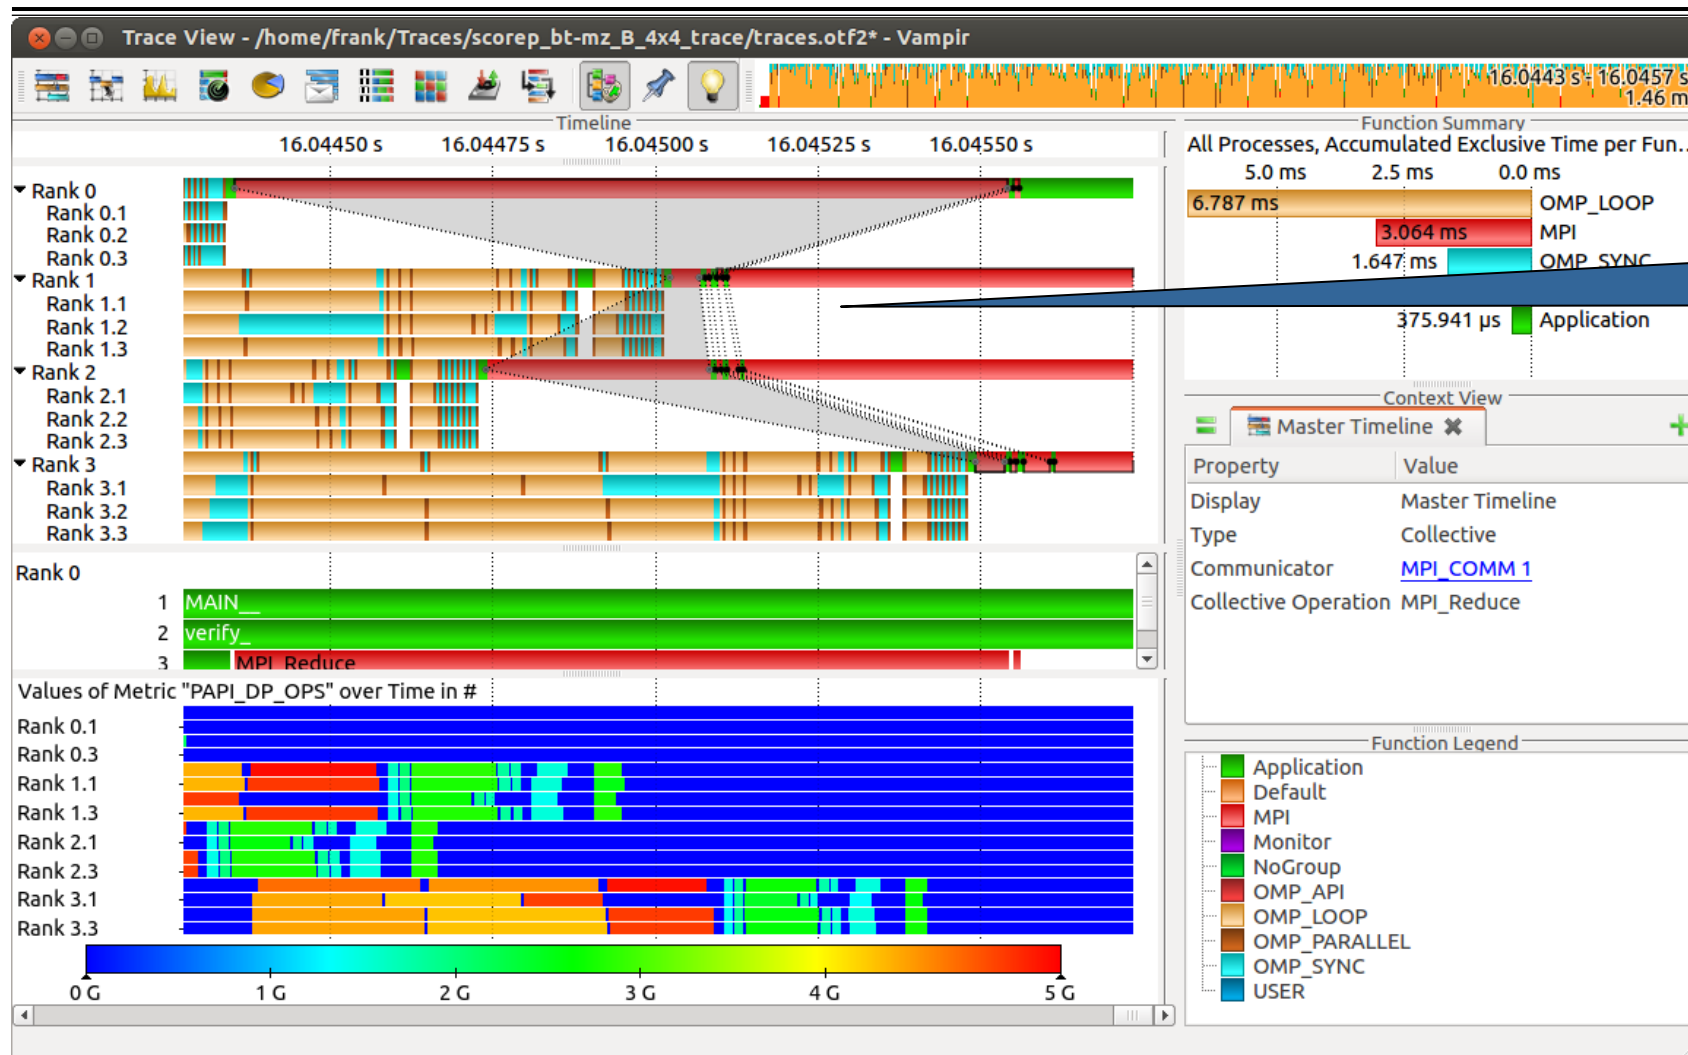

"Early reduce"
bottleneck.

Visualization of the NPB-MZ-MPI / BT trace

Process Summary

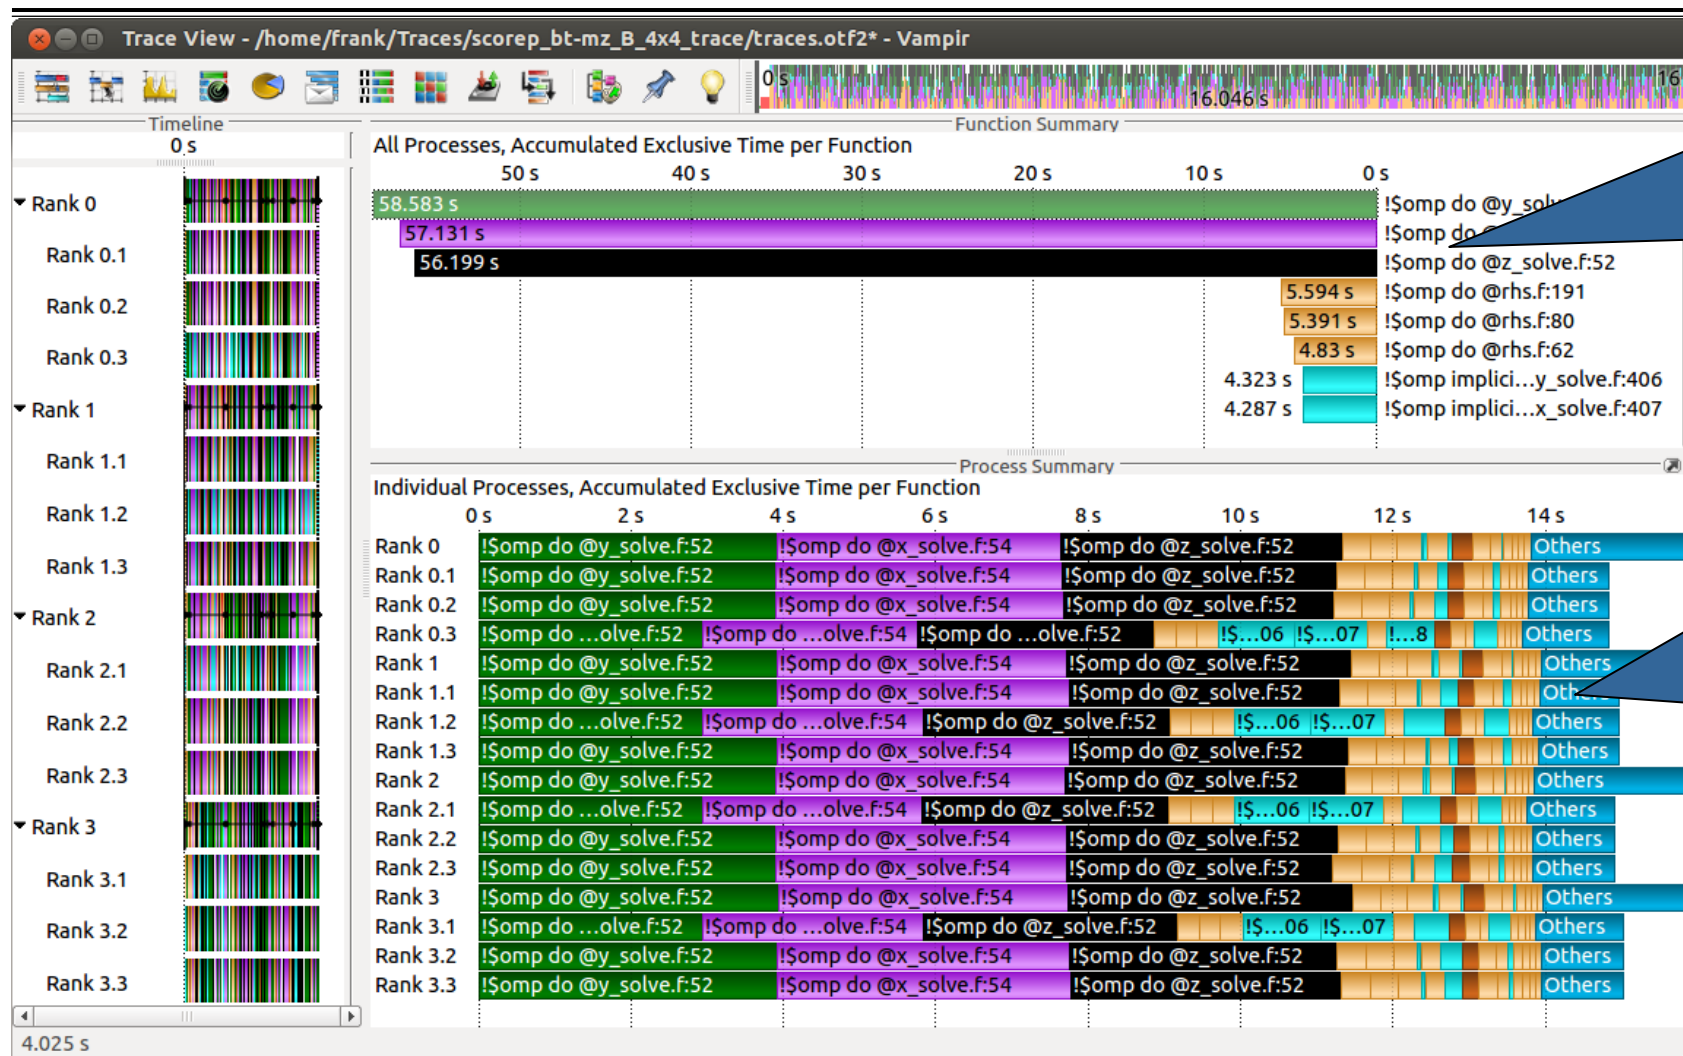


Function Summary:
Overview of the accumulated information across all functions and for a collection of processes.

Process Summary:
Overview of the accumulated information across all functions and for every process independently.

Visualization of the NPB-MZ-MPI / BT trace

Process Summary

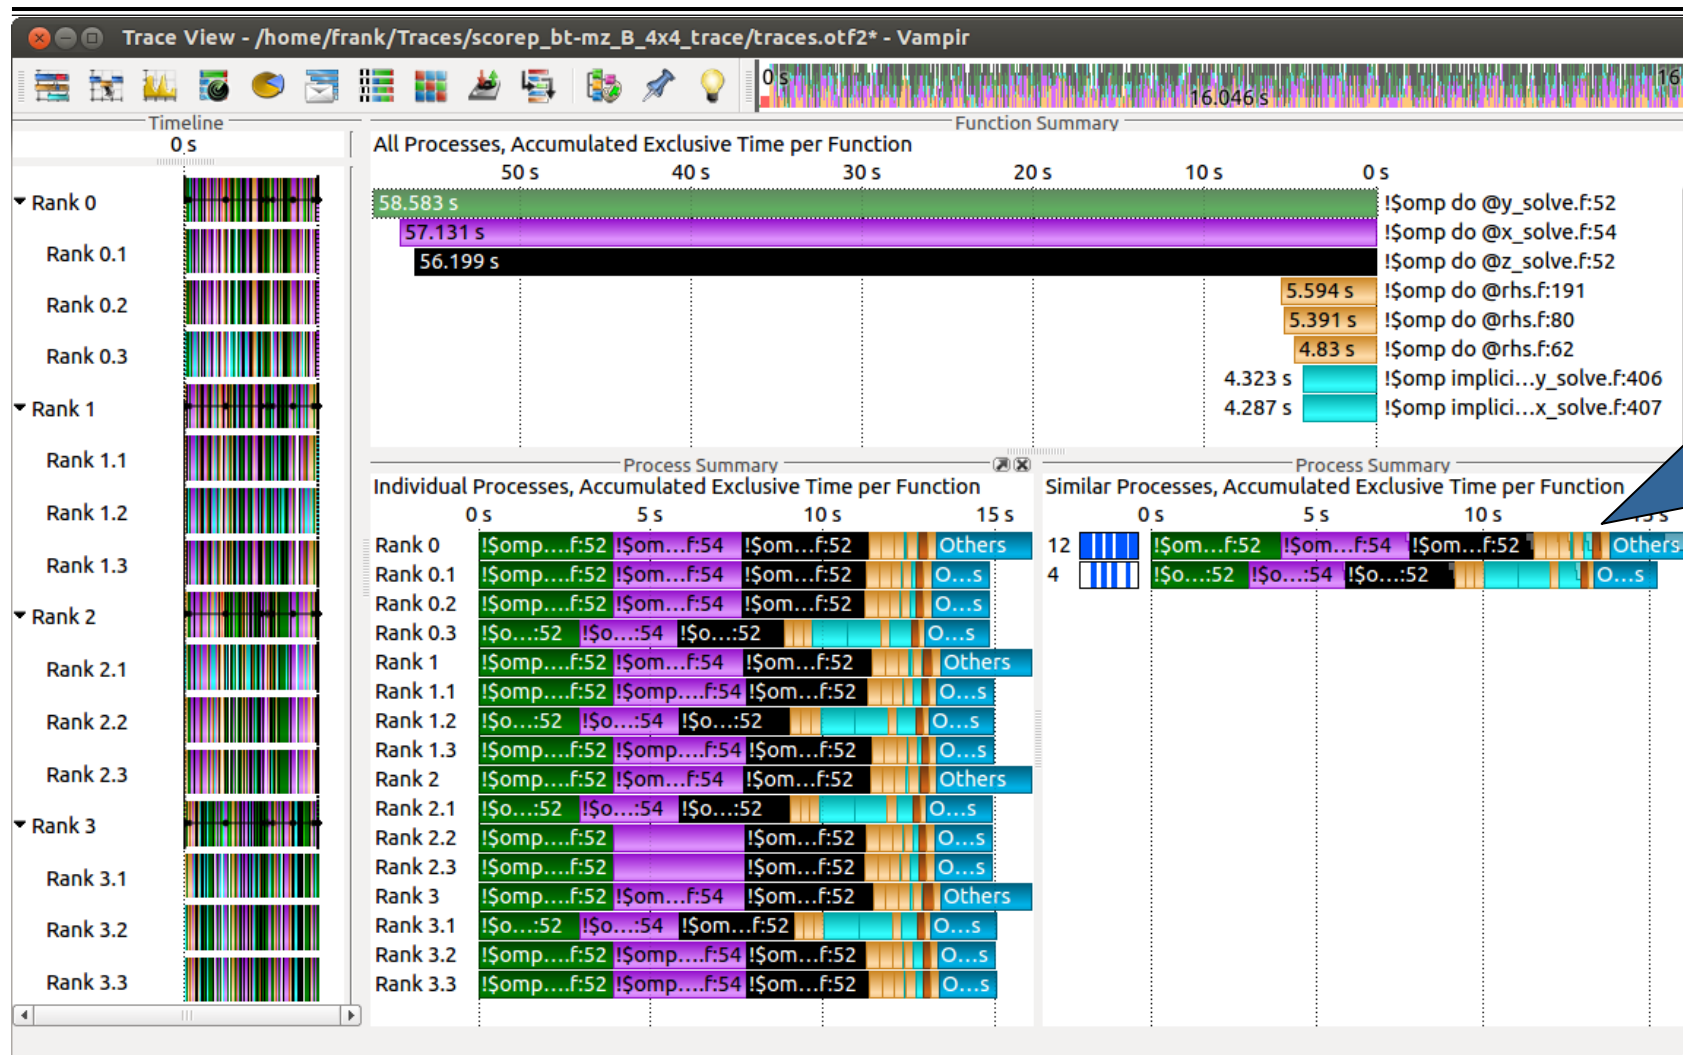

Find groups of similar processes and threads by using summarized function information.

Evolution of Vampir

- Started with MPI/OpenMP to analyze load imbalances
 - Floating Point Load Balance
 - Message Passing Memory Issue
 - Instructions per Cycle with Custom Metrics
- TU Dresden helped designing the CUPTI interface for NVIDIA
 - GROMACS MPI+OpenMP+CUDA
- I/O stack visualization
 - Multi-layer I/O
- Beyond HPC-Applications
 - Chrome Traces
 - SLURM job scheduling
 - Workflow execution traces

Summary

- Scalable visualization of event traces
- Color coding activities to easily identify program structure
- Client-Server (MPI) architecture to utilize HPC resources
- Supports multiple trace formats produced by different measurement tools
 - OTF2
 - Score-P
 - lo2s
 - TAU
 - Intel Trace Analyzer¹
 - The Structural Simulation Toolkit²
 - Chrome Trace Format
 - TensorFlow
 - PyTorch
 - Cmake build
 - WfCommons
 - Fireworks
 - RADICAL
 - Nextflow
 - Snakemake

¹ <https://www.intel.com/content/www/us/en/docs/trace-analyzer-collector/user-guide-reference/2022-2/otf2-format-support.html>

² <http://sst-simulator.org>

